



Basic Specifications

- Our Bestrack cabinets offer the most suitable solutions to our customers in server and storage applications.
- We produce our Standing Type cabinets, TS EN 61587-1 mechanical structures (cabinets for electronic equipment) with ISO 9001:2015 quality management system in our factory with a closed area of 18,000 m2.
- All cabinet dimensions comply with IEC 297-2.
- Our standing cabinets are offered to our customers in different "U" heights from 16U to 32U for products with a width of 600 mm, and in different "U" heights.
- The door parts of our standing cabinets have a front cover with 4-6 mm tempered glass option, and the back and side covers are all lockable and removable.
- Our 19" device mounting posts have square holes (9.5 *9.5 mm) and are adjustable in depth.
- "U" marking allows easy installation of 19" rack type products.
- Usage areas; It is used in large-scale network installations, data centers, airport communication networks, call centers and F/O applications.
- Degree of protection according to IP 20 is manufactured and tested.

Construction Details

Main profile structure;

Lower and upper chassis and carcass struts; The solid upper and lower chassis have a modular structure connected from 32 points with sheet metal carcass profiles.

Front cover; It is manufactured as a 4mm – 6 mm tempered glass cover.

Side covers; Maintenance and repair are easily carried out thanks to the 1.0 mm sheet thickness being lockable from the top and detachable.

Cable entries; There are cable entries from the bottom chassis.

19" device mounting posts; 1.5 mm thick mounting posts are manufactured from TS 822 pre-galvanized sheet metal. "U" signs are written on it.


Paint; Electrostatic powder coating is done with RAL 9005 – RAL 7035 paint options.





Ventilation; Thanks to our fan and thermostat modules placed on the cabin ceiling, effective ventilation can be achieved with high flow rate and low noise.

Energy unit (PDU); The energy distribution unit can optionally have a plastic or aluminum body, grounded, UPS, fused or a monitorable and manageable structure suitable for mounting in a 19" rack cabinet.

Our server type cabinets are produced as solid, safe, protected, functional and aesthetic, suitable for structural cabling and the installation and cabling of electrical and electronic products such as switches, routers, modems, servers, patch panels, telephone exchanges, alarm systems, etc. in accordance with the project.

Shipment of the product; After passing through the quality control system, our products are shipped in impact-resistant styrofoam and cardboard packaging.

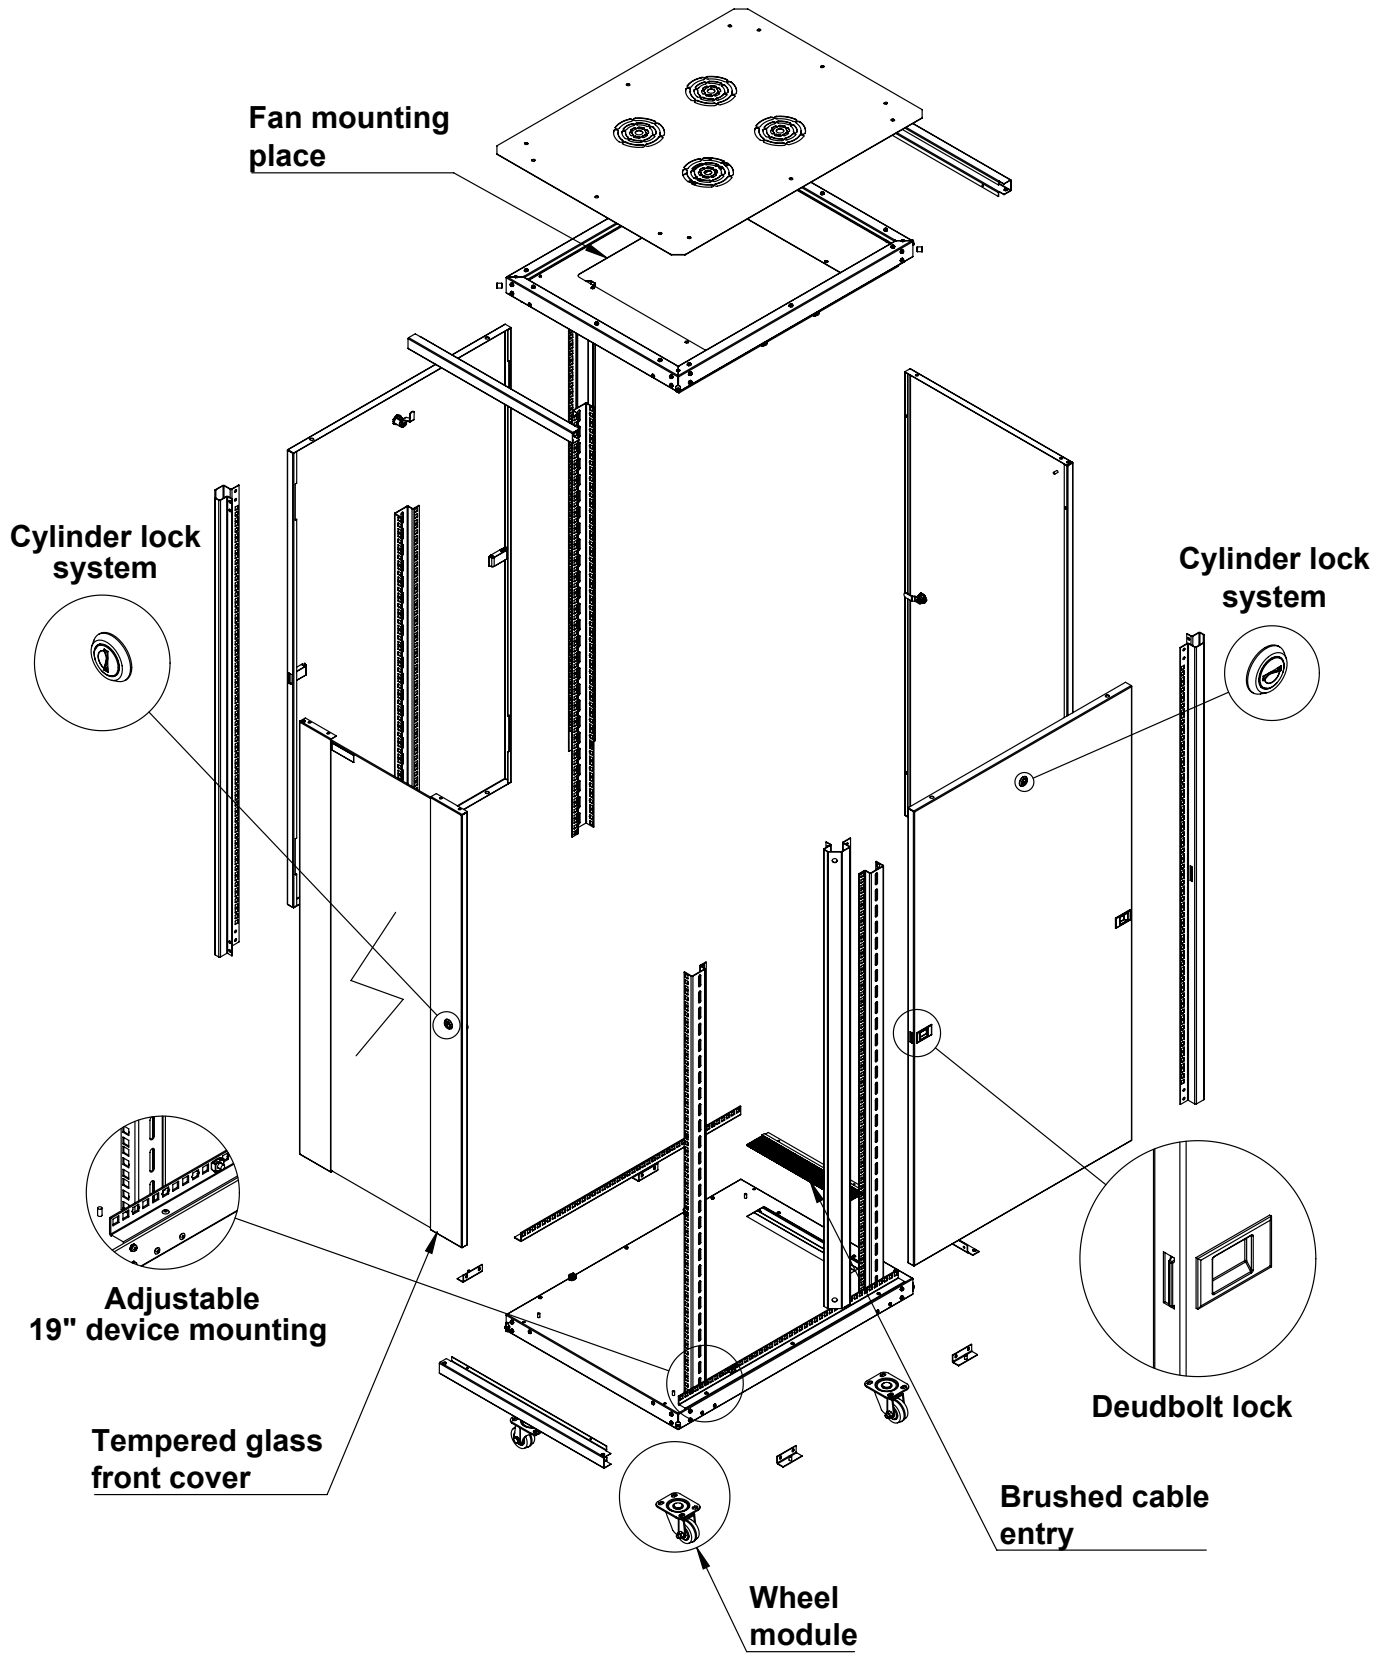

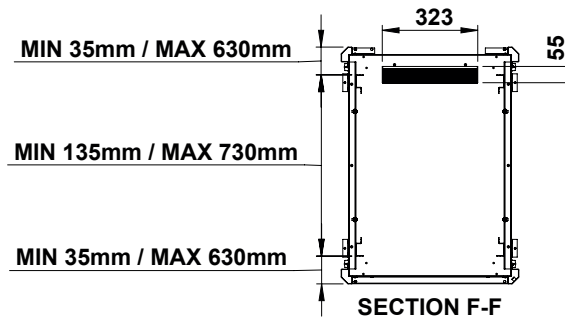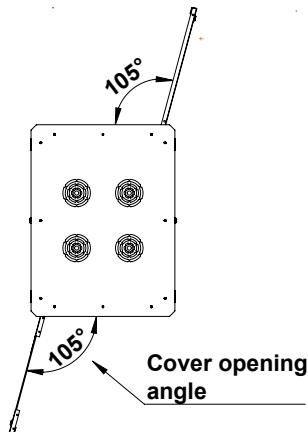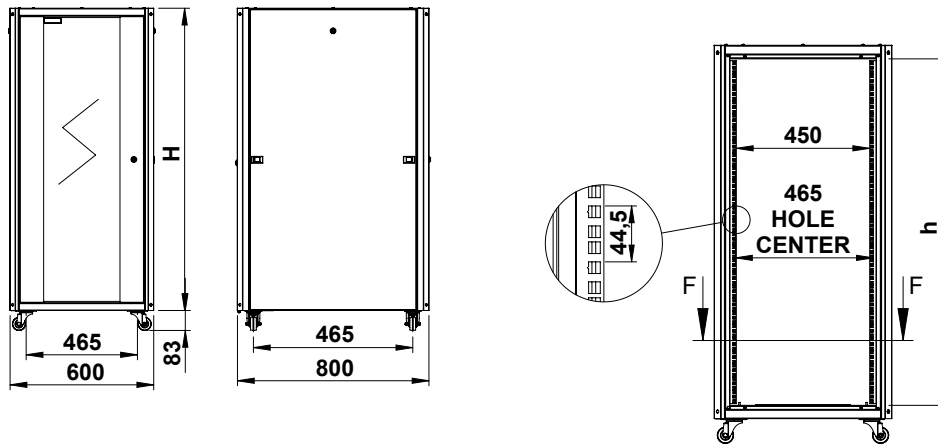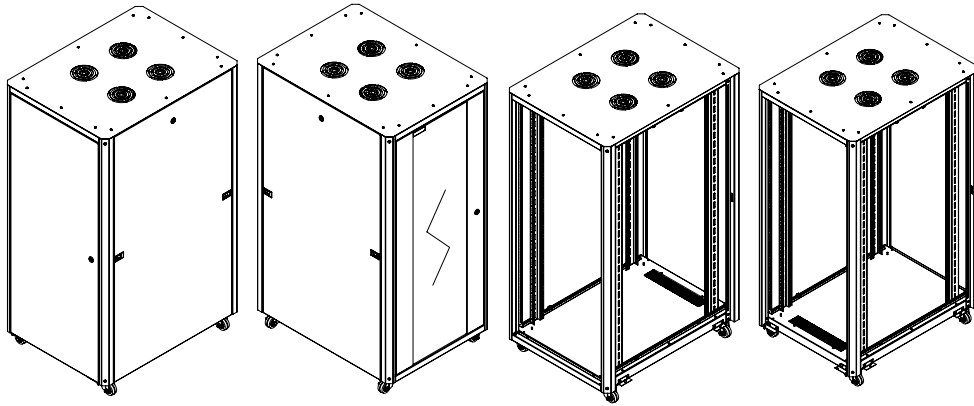

Order Code	Description	Width (mm)	Depth (mm)	Height (mm)	With Castor Height (mm)	Weight (kg)
ZEY.E12U68	12U 600x800 mm Eco Line Standing Type Cabinet	600	800	643	723	33,40
ZEY.E16U68	16U 600x800 mm Eco Line Standing Type Cabinet	600	800	821	901	40,60
ZEY.E20U68	20U 600x800 mm Eco Line Standing Type Cabinet	600	800	999	1079	46,00
ZEY.E22U68	22U 600x800 mm Eco Line Standing Type Cabinet	600	800	1088	1168	49,40
ZEY.E26U68	26U 600x800 mm Eco Line Standing Type Cabinet	600	800	1266	1346	54,60