



## **Basic Specifications**

• Our wall mounted cabinets provide the most suitable solutions to our customers, ensuring smooth and safe operation of the system in small-scale systems.

• We produce our wall-mounted cabinets in our factory with a closed area of 18,000 m2, with TS EN 61587-1 mechanical structures (cabinets for electronic equipment) and ISO 9001:2015 quality management system.

• All cabinet dimensions comply with IEC 297-2.

• gold line Our wall mounted cabinets are available in **600 mm depth** products and 7U, 9U, 12U and 16U heights. and in 7U, 9U, 12U and 16U heights for **depth 450 mm** products.

• The door parts of our wall mounted cabinets, the front cover is made of 4 mm tempered glass and the side covers are completely lockable and removable.

• Our 19" device mounting posts have square holes and are adjustable in depth.

• With its U marking, it enables easy installation of 19" rack type products.

## Construction Details Main profile structure:

Lower and upper chassis and carcass struts; The solid

upper and lower chassis have a modular structure connected from 32 points with 1.5 mm DKP sheet metal carcass profiles.

**Front cover;** It is manufactured as a 4mm – 6 mm tempered glass cover.

**Side covers;** It is made of 1 mm thick DKP sheet metal and is lockable and detachable from the top.

**Cable entries;** There are cable entry points on the lower and upper chassis.


**19" device mounting posts;** 1.5 mm thick mounting posts are manufactured from TS 822 pre-galvanized sheet metal. **Paint;** Electrostatic powder paint is applied with RAL 7035 color code.

**Ventilation**; Thanks to our fan and thermostat modules placed on the cabin ceiling, effective ventilation can be achieved with high flow rate and low noise.

**Energy unit (PDU)**; The energy distribution unit can optionally have a plastic or aluminum body, grounded, UPS, fused or a monitorable and manageable structure suitable for mounting in a 19" rack cabinet.

**Shipment of the product;** After passing through the quality control system, our products are shipped in impact-resistant styrofoam and cardboard packaging.



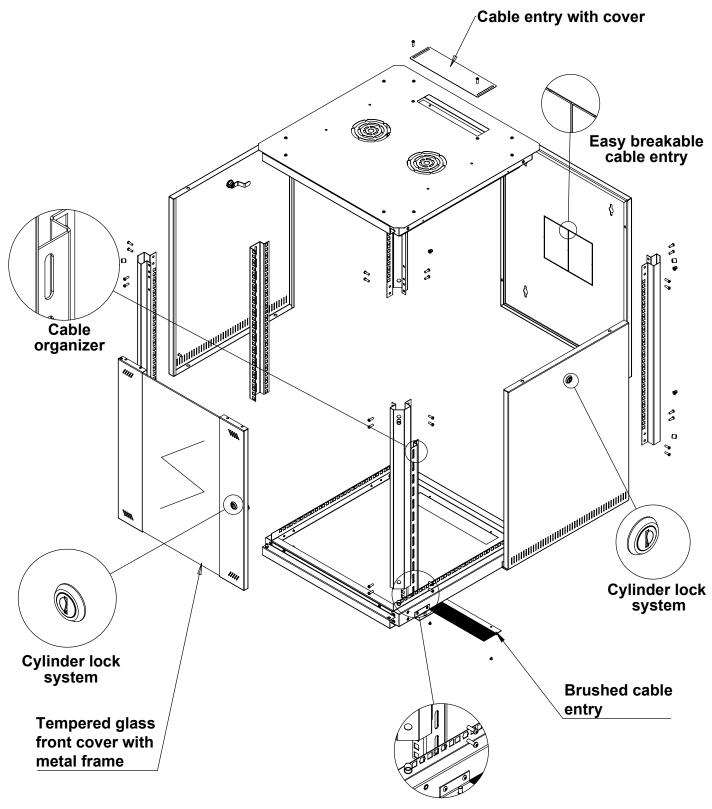

Adjustable internal strut




## 50 **Brushed cable entry** W:250mm X D:50mm 353 20 т 200 ô 600 600 450 ð 465 HOLE CENTER ê 88 ê 44,5 Cable entry Ш 168 with cover S S W:250mm X D:50mm Ţ <sup>o</sup> **Cover opening** MIN 90mm /MAX 560mm angle MIN 40mm /MAX 510mm Ч **SECTION S-S**

Order Code	Description	Width (mm)	Depth (mm)	Height (mm)	Weight (kg)
ZEY.M07U66	7U 600x600 mm Gold Line Wall - Mount Type Rack Cabinet	600	600	420	24,20
ZEY.M09U66	9U 600x600 mm Gold Line Wall - Mount Type Rack Cabinet	600	600	510	26,60
ZEY.M12U66	12U 600x600 mm Gold Line Wall - Mount Type Rack Cabinet	600	600	645	31,20
ZEY.M16U66	16U 600x600 mm Gold Line Wall - Mount Type Rack Cabinet	600	600	825	36,40

## 600x600 mm GOLD LINE WALL-MOUNT TYPE RACK CABINETS



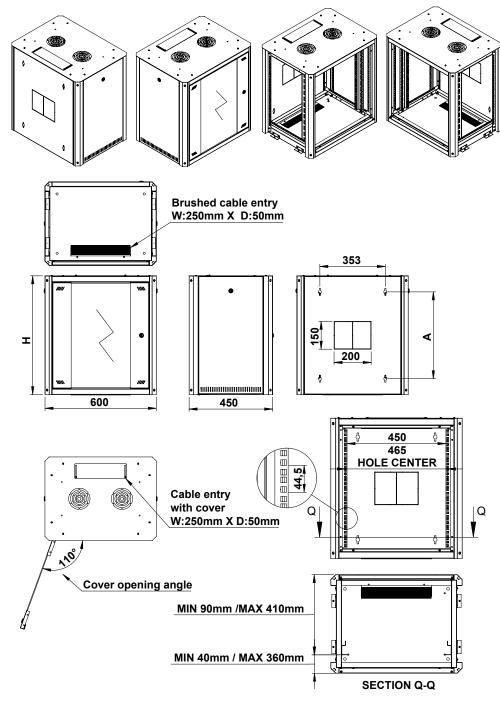

Order Code	Description	Width (mm)	Depth (mm)	Height (mm)	Weight (kg)
ZEY.M07U64	7U 600x450 mm Gold Line Wall - Mount Type Rack Cabinet	600	450	420	20,40
ZEY.M09U64	9U 600x450 mm Gold Line Wall - Mount Type Rack Cabinet	600	450	510	23,80
ZEY.M12U64	12U 600x450 mm Gold Line Wall - Mount Type Rack Cabinet	600	450	645	27,40
ZEY.M16U64	16U 600x450 mm Gold Line Wall - Mount Type Rack Cabinet	600	450	825	30,80